


414 Rec'd PCT/PTO 13 NOV 2000

FORM PTO-1390 (REV 5-93)		U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE		ATTORNEY'S DOCKET NO. 00771.00011	
TRANSMITTAL LETTER TO THE UNITED STATES DESIGNATED/ELECTED OFFICE (DO/EO/US) CONCERNING A FILING UNDER 35 U.S.C. 371				U.S. APPLICATION NO. (If known, See 37 C.F.R. 1.5) TBA 09/700184	
INTERNATIONAL APPLICATION NO. PCT/NL99/00266		INTERNATIONAL FILING DATE 4 May 1999		PRIORITY DATE CLAIMED 11 May 1998	
TITLE OF INVENTION FLEXIBLE LAMINATE AND METHOD OF MANUFACTURING SAME					
APPLICANT(S) FOR DO/EO/US Max Gregor PAPING					
Applicant herewith submits to the United State Designated/Elected Office (DO/EO/US) the following items and other information:					
<ol style="list-style-type: none"> 1. <input checked="" type="checkbox"/> This is a FIRST submission of items concerning a filing under 35 U.S.C. 371. 2. <input type="checkbox"/> This is a SECOND or SUBSEQUENT submission of items concerning a filing under 35 U.S.C. 371. 3. <input checked="" type="checkbox"/> This express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(1). 4. <input checked="" type="checkbox"/> A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date. 5. <input checked="" type="checkbox"/> A copy of the International Application as filed (35 U.S.C. 371(c)(2)) <ol style="list-style-type: none"> a. <input type="checkbox"/> is transmitted herewith (required on if not transmitted by the International Bureau). b. <input checked="" type="checkbox"/> has been transmitted by the International Bureau. A copy of Form PCT/IB/308 is attached. c. <input type="checkbox"/> is not required, as the application was filed in the United States Receiving Office (RO/US). 6. <input checked="" type="checkbox"/> A translation of the International Application into English (35 U.S.C. 371(c)(2)). 7. <input checked="" type="checkbox"/> Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3)) <ol style="list-style-type: none"> a. <input type="checkbox"/> are transmitted herewith (required only if not transmitted by the International Bureau). b. <input type="checkbox"/> have been transmitted by the International Bureau. c. <input type="checkbox"/> have not been made; however, the time limit for making such amendments has NOT expired. d. <input checked="" type="checkbox"/> have not been made and will not be made. 8. <input type="checkbox"/> A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)). 9. <input type="checkbox"/> An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)). 10. <input type="checkbox"/> A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)). 					
Items 11-16 below concern other document(s) or information included:					
<ol style="list-style-type: none"> 11. <input checked="" type="checkbox"/> An Information Disclosure Statement under 37 C.F.R. 1.97 and 1.98. 12. <input type="checkbox"/> An Assignment document for recording. A separate cover sheet in compliance with 37 C.F.R. 3.28 and 3.31 is included. 13. <input checked="" type="checkbox"/> A FIRST preliminary amendment. <input type="checkbox"/> A SECOND or SUBSEQUENT preliminary amendment. 14. <input checked="" type="checkbox"/> A Substitute Application. 15. <input type="checkbox"/> A change of power of attorney and/or address letter. 16. <input checked="" type="checkbox"/> Other items or information: 					
International Search Report (ISA/EPO) Amended Application					

U.S. APPLICATION NO. (Mandatory, See 37 CFR 1.53) TBA		INTERNATIONAL APPLICATION NO. PCT/NL99/00266		ATTORNEY'S DOCKET NO. 00771.00011	
17. <input checked="" type="checkbox"/> The following fees are submitted: Basic National Fee (37 CFR 1.492(a)(1)-(5): Search Report has been prepared by the EPO or JPO \$860.00 International preliminary examination fee paid to USPTO (37 CFR 1.482) \$690.00 No International preliminary examination fee paid to USPTO (37 CFR 1.482), but International search fee paid to USPTO (37 CFR 1.445(a)(2)) \$710.00 Neither international preliminary examination fee (37 CFR 1.482) nor International search fee (37 CFR 1.445(a)(2)) paid to USPTO \$1,000.00 International preliminary examination fee paid to USPTO (37 CFR 1.482) and all claims satisfied provisions of PCT Article 33(1)-(4) \$100.00				CALCULATIONS	PTO USE ONLY
ENTER APPROPRIATE BASIC FEE AMOUNT =				\$860.00	
Surcharge of \$130.00 for furnishing the oath or declaration later than 20 or 30 months from the earliest claimed priority date (37 CFR 1.492(e)).				\$0.00	
CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE		
Total Claims	18 - 20 =	0	X \$ 18.00	\$0.00	
Independent Claims	2 - 3 =	0	X \$ 78.00	\$0.00	
Multiple dependent claims (if applicable)			X \$260.00	\$0.00	
TOTAL OF ABOVE CALCULATIONS =				\$860.00	
Reduction by 1/2 for filing by small entity, if applicable. Verified Small Entity statement must also be filed (note 37 CFR 1.9, 1.27, 1.28).				\$0.00	
SUBTOTAL =				\$860.00	
Processing fee of \$130.00 for furnishing the English translation later than 20 or 30 months from the earliest claimed priority date (37 CFR 1.492(f)).				\$0.00	
TOTAL NATIONAL FEE =				\$860.00	
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 per property.				\$0.00	
TOTAL FEES ENCLOSED =				\$860.00	
				Amount to be: refunded	\$
				charged	\$
a. <input type="checkbox"/> A check in the amount of \$_____ to cover the above fees is enclosed. b. <input checked="" type="checkbox"/> Please charge \$860.00 for the application filing fee to our Deposit Account No. 19-0733. However, if the calculated fee is not correct, you are authorized to charge any additional fee or credit any overpayment to our Deposit Account No. 19-0733. A duplicate copy of this sheet is enclosed. c. <input checked="" type="checkbox"/> The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. 19-0733. A duplicate copy of this sheet is enclosed.					
NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.					
SEND ALL CORRESPONDENCE TO: Banner & Witcoff, Ltd. Eleventh Floor 1001 G Street, N.W. Washington, D.C. 20001-4597 Telephone: (202) 508-9100					
 SIGNATURE Franklin D. Wolfe Registration No. 19,724 Date: November 13, 2000					

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re the Application of

Max Gregor PAPING

Serial No.: TBA

Filed: Herewith (November 13, 2000)

For: FLEXIBLE LAMINATE AND METHOD OF MANUFACTURING SAME

Atty. Docket: 00771.00011

U.S. National Stage
International Application No.:
PCT/NL99/00266

PRELIMINARY AMENDMENT

Assistant Commissioner of Patents
Washington, D. C. 20231

BOX PCT

Sir:

Prior to calculation of claim fees and examination, please amend the instant application.

IN THE SPECIFICATION, CLAIMS AND ABSTRACT:

Please amend the entire application as shown in the annexed "Amended Application." A clean "Substitute Application" is also annexed with all of the amendments incorporated therein.

REMARKS

Due to Applicant's substantial amendments to the specification, claims and abstract, Applicant submits herewith a Substitute Application to replace the Original Application. To clearly show that no new matter has been added, Applicant has annexed hereto an Amended Application which clearly denotes all of the modifications made to form the Substitute Application.

Applicant has made amendments to many of the claims. Each claim is labeled as "(Original)" where no amendments were made; "(Amended)" where amendments have been made; and "(New)" where the claim is newly added.

Examination on the merits of the instant application is respectfully requested.

Respectfully submitted,



Franklin D. Wolffe
Reg. No. 19,724

Date: November 13, 2000

BANNER & WITCOFF, LTD.
Eleventh Floor
1001 G Street, N.W.
Washington, D. C. 20001-4597
(202) 508-9100

Annexes: (1) Amended Application
 (2) Substitute Application

FDW:lab

FLEXIBLE LAMINATE AND METHOD OF MANUFACTURING SAME**BACKGROUND OF THE INVENTION**

5 In the case of, for instance, engine trouble in a car, traffic safety requires the placing of a so-called warning triangle at a distance behind this car. Such warning triangles are mechanical structures which are carried folded up in the car and which must be placed vertically on the road with a special collapsible foot. Such warning triangles are heavy and, with a view to practical handling, take a relatively small form, whereby their optical effect is limited, even in the case of substantial reflective properties.

10 Seen as a further drawback of known warning triangles is that once the engine trouble has been repaired the warning triangle is often left behind, so that a new one has to be purchased.

15 In addition, structures placed freely on a foot are subject to wind influences. It often occurs that a warning triangle cannot be placed stably due to strong wind.

BRIEF DESCRIPTION OF THE INVENTION

20 The invention has the general object of providing solutions to the stated problems.

 The invention further has the general object of providing products which can be used for the most diverse applications, and not only as warning triangles, and which are not subject to any of the said problems described above with reference to warning triangles.

25

BRIEF DESCRIPTION OF THE DRAWINGS

 The invention will be further described, by way of examples, with reference to the accompanying drawings, wherein:

30 Fig. 1 is a perspective view of a triangular warning device showing the three layer construction; and

Fig. 2 is a side view of the alternative two layer construction, also showing two additional structural modifications.

DETAILED DESCRIPTION OF THE INVENTION

5 In respect of the above, and as shown in Fig. 1, the invention provides a flexible laminate, generally designated 1, comprising:

- a first layer 10 serving as carrier layer;
- a light-active second layer 11 situated on an outer surface of this laminate; and
- 10 a permanent magnetic third layer 12 for releasable magnetic attachment of the laminate to a ferromagnetic surface.

Such a laminate is known from US-A-5 005 306.

The optical properties of the light-active layer as according to this American patent specification have to be activated by external electrical energizing. This limits easy use of this laminate.

- 15 With this in mind, the laminate according to the invention has the feature that the light-active second layer acts without external energizing to change the properties of incident light such that the light reflected by this layer has signaling properties.

- Such a laminate according to the invention can easily be rolled up and transported in a vehicle in rolled-up state and be unrolled when use is required, whereafter it can be temporarily adhered with a number of very simple hand movements at any desired location to a ferromagnetic part of the surface of the vehicle. The laminate cannot be left behind after use since it forms a temporary unit with the vehicle. It can be placed on and removed from the vehicle very simply and without even the slightest damage.
- 20

- 25 The carrier layer serves to impart the required mechanical strength to the laminate, as shown in Fig. 2. A practical embodiment, generally designated 2, has the special feature that the first layer 10 incorporates the properties of the third layer 12 providing a combination layer 13. A prerequisite here is of course that the permanent magnetic third layer has a sufficiently great mechanical strength. This can be achieved
- 30 in simple manner by making use of a flexible plastic or rubber-like material in which

magnetic means are embedded. Such magnetic means can take the form of permanent magnets or a ferromagnetic and pre-magnetized powder.

A variant has the special feature that the second layer is arranged locally in distributed zones.

5 Particularly in the case of warning systems a pattern of light-active zones 14 visually separated from each other can be advantageous.

In order to achieve a very great mechanical strength the laminate can have the special feature that the first layer comprises a textile fabric or non-woven material.

10 A practical embodiment has the special feature that the layers are mutually adhered by respective glue layers.

15 A specific embodiment of the laminate according to the invention has the special feature that the second layer is (photo-) luminescent. Such an embodiment can independently radiate light in dark conditions without this being a direct reaction to incident light. Such an embodiment generally has the drawback that the light intensity is relatively low.

Another embodiment has the special feature that the second layer is light-reflecting. Such an embodiment is for instance very suitable for applications related to that of known warning triangles.

20 A specific embodiment has the special feature that the second layer has at least one chosen color, for instance a warning color, a pattern of contrasting colors or the like. In the case of a warning triangle the color in question can for instance be red, optionally in combination with other colors such as blue, yellow or orange. The pattern of contrasting colors can for instance comprise the colors red and white.

25 To enable easy removal of the laminate according to the invention after use, it can advantageously have the special feature that the laminate comprises an edge or end zone 15 without permanent magnetization.

An advantageous embodiment has the special feature that the magnetization of the third layer has an anisotropic character. Such a laminate can be rolled up easily without the layers becoming attached to each other.

30 In the case of use as safety provision in cars, for instance as warning triangle, the laminate according to the invention can advantageously have the special feature

that at least one edge zone displays an aerodynamically acting form 16 tapering toward its free edge. This can effectively prevent passing cars from causing an air flow along the laminate arranged on the car such that it is pulled loose of the car.

5 A preferred embodiment has the special feature that the laminate is modeled to a desired shape, for instance an elongate strip, the general shape of a road sign, a warning triangle or the like. An elongate strip can be embodied in any desired color or combinations thereof and be arranged in any desired, for instance wholly random manner on a car stopped on a road. This provides a very strong warning function. A warning triangle can be formed by punching the relevant shape from a larger piece of
10 laminate, while alternatively three wide strips can be mutually connected by glueing or in other suitable manner.

In order to prevent a laminate according to the invention being stolen by another person, it can advantageously have the special feature that the laminate has a form such that at least one end can be clampingly secured between a door or a window of
15 a vehicle and is optionally with a widened part. The arrangement of a widened portion 17 on one end can have the advantage that the widened portion cannot pass through the connection between window, door on the one hand and the recess on the other. In order to prevent malicious persons being able to remove the laminate by cutting, it could optionally be provided with a strengthening wire, for instance a steel wire. Such
20 a wire cannot be cut through easily.

The invention further provides a method of manufacturing a laminate in accordance with the above stated specifications. Such a method comprises the steps of:

25 a) providing the first layer, the second layer and the third layer, which first and third layers are optionally the same;

b) permanently connecting these layers to each other.

A specific embodiment of this method comprises the step of:

c) performing step (b) by stitching, welding, glueing with a pressure-sensitive glue, glueing with a thermally-activated glue or hot melt, or the like.

30 A very practical embodiment of this latter variant comprises the step of:

d) performing step (c) by using a thermally-activated glue layer and performing step (a) by providing a magnetizable and not, at least not substantially, magnetized layer, carrying the pre-laminate formed by the layers placed onto one another through a heating device so as to activate the glue layer, carrying the heated pre-laminate through the pinch of pressure rollers and magnetizing the magnetizable layer in the heated state of the pre-laminate.

According to another aspect of the invention a method is embodied such that it comprises the step of:

e) manufacturing the laminate by co-extruding at least two layers.

A significant advantage of the laminate according to the invention is that because of its flexibility it can adjust itself easily to the surface to which it is attached. The laminate is therefore given a relatively flat and flexible form. During production it is formed into the required shapes, for instance by punching, cutting or the like. Strips of the laminate can have standard lengths of for instance 0.1-2 m.

A laminate according to the invention can be supplied for diverse applications in just as many shapes and widths. The laminate is also very suitable to serve as marking for special parts of a crash-barrier, for instance to signpost bends, in which case different colors can be used which together indicate a direction.

Such a direction indicator can for instance be a pattern of successive zones with generally chevron shapes which indicate the direction of the bend and have for instance the alternating colors red-white-red-white and so on.

Diverse per se known products are suitable as permanent magnetic layer. These are for instance the magnetic foils of the company Bakker Magnetics B. V., Son, the Netherlands, which foils belong to the group with the type specifications BM200, BM700 and BM701.

CLAIMS

1. (Amended) Flexible laminate, comprising:
a first layer serving as carrier layer;
a light-active second layer situated on an outer surface of the laminate; and
5 a permanent magnetic third layer for releasable magnetic attachment of the laminate to a ferromagnetic surface;
characterized in that the light-active second layer acts without external energizing to change the properties of incident light such that the light reflected by this layer has signaling properties.
- 10 2. (Original) Laminate as claimed in claim 1, wherein the first layer is also the third layer.
3. (Original) Laminate as claimed in claim 1, wherein the second layer is
15 arranged locally in distributed zones.
4. (Original) Laminate as claimed in claim 1, wherein the first layer comprises a textile fabric or non-woven material.
- 20 5. (Original) Laminate as claimed in claim 1, wherein the layers are mutually adhered by respective glue layers.
6. (Original) Laminate as claimed in claim 1, wherein the second layer is (photo-) luminescent.
- 25 7. (Original) Laminate as claimed in claim 1, wherein the second layer is optionally diffusely light-reflecting.
8. (Amended) Laminate as claimed in claim 1, wherein the second layer has at
30 least one chosen color, for instance a warning color, a pattern of contrasting colors or the like.

9. (Original) Laminate as claimed in claim 1, wherein the laminate comprises an edge or end zone without permanent magnetization.
10. (Original) Laminate as claimed in claim 1, wherein the magnetization of the third layer has an anisotropic character.
11. (Original) Laminate as claimed in claim 1, wherein at least one edge zone displays an aerodynamically acting form tapering toward its free edge.
12. (Amended) Laminate as claimed in claim 1, wherein the laminate is modeled to a desired shape, for instance an elongate strip, the general shape of a road sign, a warning triangle or the like.
13. (Original) Laminate as claimed in claim 12, wherein the laminate has a form such that at least one end can be clampingly secured between a door or a window of a vehicle and is optionally provided with a widened portion.
14. (Amended) Method of manufacturing a laminate, which method comprises the steps of:
- a) providing a first carrier layer, a second light-active layer and a third magnetic layer;
- b) permanently connecting these layers to each other.
15. (Original) Method as claimed in claim 14, comprising the step of:
- c) performing step (b) by stitching, welding, glueing with a pressure-sensitive glue, glueing with a thermally-activated glue or hot melt, or the like.
16. (Amended) Method as claimed in claim 15, comprising the step of:
- d) performing step (c) by using a thermally-activated glue layer and performing step (a) by providing a magnetizable and not, at least not substantially, magnetized layer, carrying the pre-laminate formed by the layers placed onto one

another through a heating device so as to activate the glue layer, carrying the heated pre-laminate through the pinch of pressure rollers and magnetizing the magnetizable layer in the heated state of the pre-laminate.

- 5 17. (Original) Method as claimed in claim 14, comprising the step of:
- e) manufacturing the laminate by co-extruding at least two layers.



18. (New) The method of claim 14, wherein the first and third layers are formed from a single layer having magnetic material incorporated therein.

11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2194
2195
2196
2197
2198
2199
2200
2201
2202
2203
2204
2205
2206
2207
2208
2209
2210
2211
2212
221

ABSTRACT

5 A flexible laminate, comprising: the light-active second layer acts without external energizing to change the properties of incident light such that the light reflected by this layer has signaling properties; a first layer serving as carrier layer; a light-active second layer situated on an outer surface of this laminate; and a permanent magnetic third layer for releasable magnetic attachment of the laminate to a ferromagnetic surface. The laminate has the feature that the light-active second layer acts without external energizing to change the properties of incident light such that the light reflected by this layer has signaling properties.

10

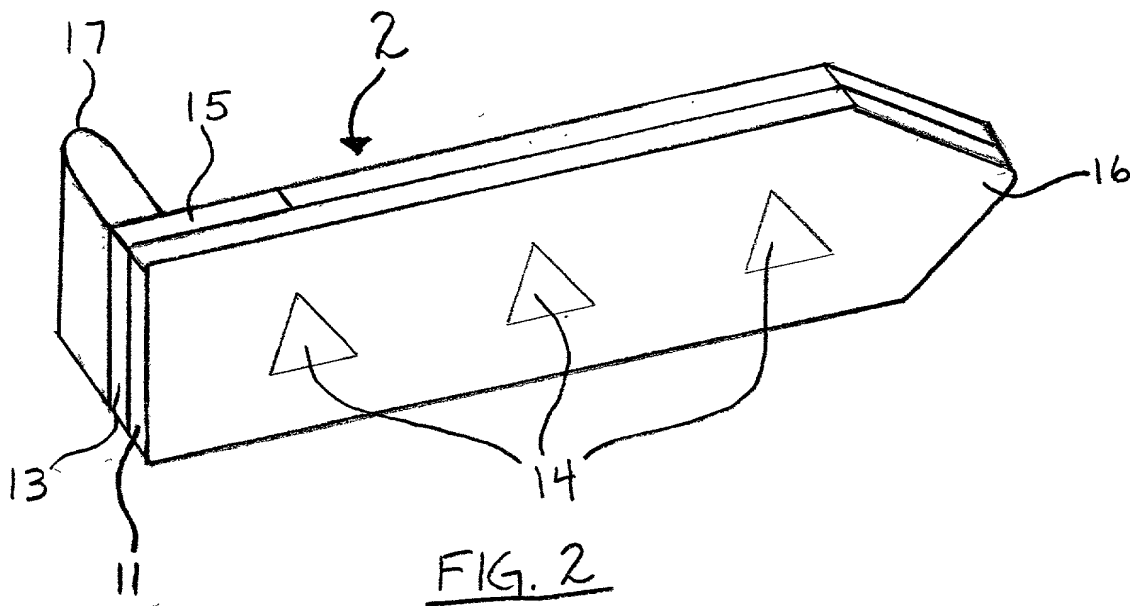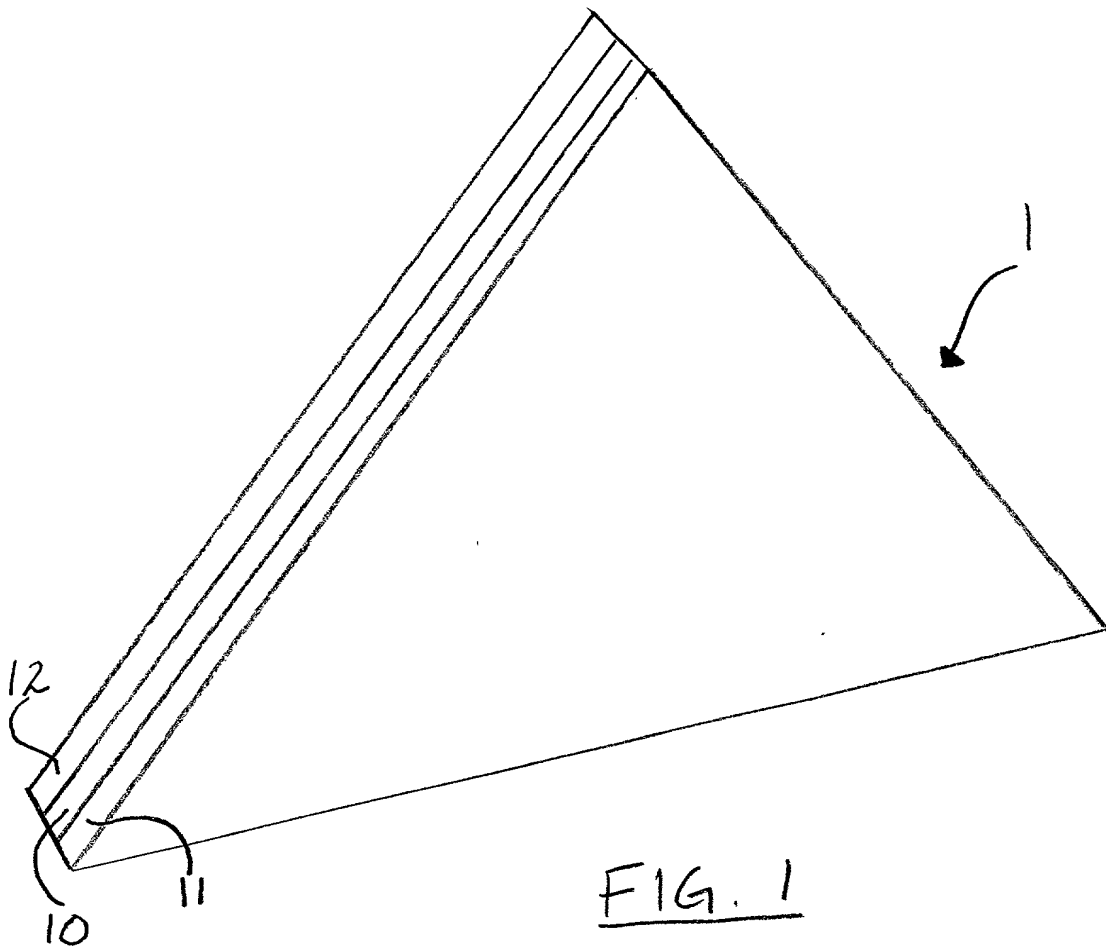

FLEXIBLE LAMINATE AND METHOD OF MANUFACTURING SAME

In the case of for instance engine trouble in a car, traffic safety requires the placing of a so-called warning triangle at a distance behind this car. Such warning triangles are mechanical structures which are carried folded up in the car and which must be placed vertically on the road with a special collapsible foot. Such warning triangles are heavy and, with a view to practical handling, take a relatively small form, whereby their optical effect is limited, even in the case of substantial reflective properties.

Seen as a further drawback of known warning triangles is that once the engine trouble has been repaired the warning triangle is often left behind, so that a new one has to be purchased.

In addition, structures placed freely on a foot are subject to wind influences. It often occurs that a warning triangle cannot be placed stably due to strong wind.

The invention has the general object of providing solutions to the stated problems.

The invention further has the general object of providing products which can be used for the most diverse applications, and not only as warning triangles, and which are not subject to any of the said problems described above with reference to warning triangles.

In respect of the above the invention provides a flexible laminate, comprising:

- a first layer serving as carrier layer;
- a light-active second layer situated on an outer surface of this laminate; and
- a permanent magnetic third layer for releasable magnetic attachment of the laminate to a ferromagnetic surface.

Such a laminate is known from US-A-5 005 306.

The optical properties of the light-active layer as according to this American patent specification have to be activated by external electrical energizing. This
5 limits easy use of this laminate.

With this in mind, the laminate according to the invention has the feature that

the light-active second layer acts without external energizing to change the properties of incident light
10 such that the light reflected by this layer has signalling properties.

Such a laminate according to the invention can easily be rolled up and transported in a vehicle in rolled-up state and be unrolled when use is required,
15 whereafter it can be temporarily adhered with a number of very simple hand movements at any desired location to a ferromagnetic part of the surface of the vehicle. The laminate cannot be left behind after use since it forms a temporary unit with the vehicle. It can be placed on
20 and removed from the vehicle very simply and without even the slightest damage.

The carrier layer serves to impart the required mechanical strength to the laminate. A practical embodiment has the special feature that the first layer
25 is also the third layer. A prerequisite here is of course that the permanent magnetic third layer has a sufficiently great mechanical strength. This can be achieved in simple manner by making use of a flexible plastic or rubber-like material in which magnetic means
30 are embedded. Such magnetic means can take the form of permanent magnets or a ferromagnetic and pre-magnetized powder.

A variant has the special feature that the second layer is arranged locally in distributed zones.
35 Particularly in the case of warning systems a pattern of light-active zones visually separated from each other can be advantageous.

In order to achieve a very great mechanical strength the laminate can have the special feature that the first layer comprises a textile fabric or non-woven material.

- 5 A practical embodiment has the special feature that the layers are mutually adhered by respective glue layers.

- 10 A specific embodiment of the laminate according to the invention has the special feature that the second layer is (photo-)luminescent. Such an embodiment can independently radiate light in dark conditions without this being a direct reaction to incident light. Such an embodiment generally has the drawback that the light intensity is relatively low.

- 15 Another embodiment has the special feature that the second layer is light-reflecting. Such an embodiment is for instance very suitable for applications related to that of known warning triangles.

- 20 A specific embodiment has the special feature that the second layer has at least one chosen colour, for instance a warning colour, a pattern of contrasting colours or the like. In the case of a warning triangle the colour in question can for instance be red, optionally in combination with other colours such as
25 blue, yellow or orange. The pattern of contrasting colours can for instance comprise the colours red and white.

- 30 To enable easy removal of the laminate according to the invention after use, it can advantageously have the special feature that the laminate comprises an edge or end zone without permanent magnetization.

- 35 An advantageous embodiment has the special feature that the magnetization of the third layer has an anisotropic character. Such a laminate can be rolled up easily without the layers becoming attached to each other.

In the case of use as safety provision in cars, for instance as warning triangle, the laminate according to the invention can advantageously have the special feature that at least one edge zone displays an aerodynamically acting form tapering toward its free edge. This can effectively prevent passing cars from causing an air flow along the laminate arranged on the car such that it is pulled loose of the car.

A preferred embodiment has the special feature that the laminate is modelled to a desired shape, for instance an elongate strip, the general shape of a road sign, a warning triangle or the like. An elongate strip can be embodied in any desired colour or combinations thereof and be arranged in any desired, for instance wholly random manner on a car stopped on a road. This provides a very strong warning function. A warning triangle can be formed by punching the relevant shape from a larger piece of laminate, while alternatively three wide strips can be mutually connected by glueing or in other suitable manner.

In order to prevent a laminate according to the invention being stolen by another person, it can advantageously have the special feature that the laminate has a form such that at least one end can be clampingly secured between a door or a window of a vehicle and is optionally provided with a widened part. The arrangement of a widened portion on one end can have the advantage that the widened portion cannot pass through the connection between window, door on the one hand and the recess on the other. In order to prevent malicious persons being able to remove the laminate by cutting, it could optionally be provided with a strengthening wire, for instance a steel wire. Such a wire cannot be cut through easily.

The invention further provides a method of manufacturing a laminate in accordance with the above

stated specifications. Such a method comprises the steps of:

- a) providing the first layer, the second layer and the third layer, which first and third layers are optionally the same;
- b) permanently connecting these layers to each other.

A specific embodiment of this method comprises the step of:

- c) performing step (b) by stitching, welding, glueing with a pressure-sensitive glue, glueing with a thermally-activated glue or hot melt, or the like.

A very practical embodiment of this latter variant comprises the step of:

- d) performing step (c) by using a thermally-activated glue layer and performing step (a) by providing a magnetizable and not, at least not substantially, magnetized layer, carrying the pre laminate formed by the layers placed onto one another through a heating device so as to activate the glue layer, carrying the heated pre laminate through the pinch of pressure rollers and magnetizing the magnetizable layer in the heated state of the pre laminate.

According to another aspect of the invention a method is embodied such that it comprises the step of:

- e) manufacturing the laminate by co-extruding at least two layers.

A significant advantage of the laminate according to the invention is that because of its flexibility it can adjust itself easily to the surface to which it is attached. The laminate is therefore given a relatively flat and flexible form. During production it is formed into the required shapes, for instance by punching, cutting or the like. Strips of the laminate can have standard lengths of for instance 0.1-2 m.

A laminate according to the invention can be supplied for diverse applications in just as many shapes

and widths. The laminate is also very suitable to serve as marking for special parts of a crash-barrier, for instance to signpost bends, in which case different colours can be used which together indicate a direction.

- 5 Such a direction indicator can for instance be a pattern of successive zones with generally chevron shapes which indicate the direction of the bend and have for instance the alternating colours red-white-red-white and so on.

- Diverse per se known products are suitable as
10 permanent magnetic layer. These are for instance the magnetic foils of the company Bakker Magnetics B.V., Son, the Netherlands, which foils belong to the group with the type specifications BM200, BM700 and BM701.

15

CLAIMS

1. Flexible laminate, comprising:
a first layer serving as carrier layer;
a light-active second layer situated on an outer
surface of this laminate; and
5 a permanent magnetic third layer for releasable
magnetic attachment of the laminate to a ferromagnetic
surface;

characterized in that

the light-active second layer acts without external
10 energizing to change the properties of incident light
such that the light reflected by this layer has
signalling properties.

2. Laminate as claimed in claim 1, wherein the
first layer is also the third layer.

15 3. Laminate as claimed in claim 1, wherein the
second layer is arranged locally in distributed zones.

4. Laminate as claimed in claim 1, wherein the
first layer comprises a textile fabric or non-woven
material.

20 5. Laminate as claimed in claim 1, wherein the
layers are mutually adhered by respective glue layers.

6. Laminate as claimed in claim 1, wherein the
second layer is (photo-)luminescent.

25 7. Laminate as claimed in claim 1, wherein the
second layer is optionally diffusely light-reflecting.

8. Laminate as claimed in claim 1, wherein the
second layer has at least one chosen colour, for
instance a warning colour, a pattern of contrasting
colours or the like.

30 9. Laminate as claimed in claim 1, wherein the
laminate comprises an edge or end zone without permanent
magnetization.

10. Laminate as claimed in claim 1, wherein the magnetization of the third layer has an anisotropic character.

11. Laminate as claimed in claim 1, wherein at
5 least one edge zone displays an aerodynamically acting form tapering toward its free edge.

12. Laminate as claimed in claim 1, wherein the laminate is modelled to a desired shape, for instance an elongate strip, the general shape of a road sign, a
10 warning triangle or the like.

13. Laminate as claimed in claim 12, wherein the laminate has a form such that at least one end can be clampingly secured between a door or a window of a vehicle and is optionally provided with a widened
15 portion.

14. Method of manufacturing a laminate as claimed in any of the claims 1-13, which method comprises the following steps of:

a) providing the first layer, the second layer and
20 the third layer, which first and third layers are optionally the same;

b) permanently connecting these layers to each other.

15. Method as claimed in claim 14, comprising the
25 step of:

c) performing step (b) by stitching, welding, glueing with a pressure-sensitive glue, glueing with a thermally-activated glue or hot melt, or the like.

16. Method as claimed in claim 15, comprising the
30 step of:

d) performing step (c) by using a thermally-activated glue layer and performing step (a) by providing a magnetizable and not, at least not substantially, magnetized layer, carrying the
35 prelaminate formed by the layers placed onto one another through a heating device so as to activate the glue layer, carrying the heated prelaminate through the pinch

of pressure rollers and magnetizing the magnetizable layer in the heated state of the prelaminate.

17. Method as claimed in claim 14, comprising the step of:

- 5 e) manufacturing the laminate by co-extruding at least two layers.

Banner & Witcoff Ref. No.
Client Ref. No.

00771.00011
G PEM/NJ/Budev10

SOLE DECLARATION FOR PATENT APPLICATION

As the below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my names;

I believe I am the original, first and sole inventor of the subject matter which is claimed and for which a patent is sought on the invention entitled FLEXIBLE LAMINATE AND METHOD OF MANUFACTURING SAME, the specification of which

- ☐ is attached hereto.
☒ was filed on November 13, 2000 as Application Serial Number 09/700,184 and was amended on November 13, 2000 (if applicable).
☒ was filed under the Patent Cooperation Treaty (PCT) and accorded International Application No. PCT/NL99/00266, filed May 4, 1999, and amended on (if any).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I hereby acknowledge the duty to disclose information which is material to patentability in accordance with Title 37, Code of Federal Regulations, 1.56(a).

Prior Foreign Application(s)

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application(s) for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Country	Application No.	Date of Filing (day month year)	Date of Issue (day month year)	Priority Claimed Under 35 U.S.C. §119
The Netherlands	1009129	11 May 1998		yes

Prior United States Provisional Application(s)

I hereby claim priority benefits under Title 35, United States Code, 119(e)(1) of any U.S. provisional application listed below:

U.S. Provisional Application No.	Date of Filing (day month year)	Priority Claimed Under 35 U.S.C., 119(e)(1)

Prior United States Application(s)

I hereby claim the benefit under Title 35, United States Code, 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, 1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

Application Serial No.	Date of Filing (Day, Month, Year)	Status <input type="checkbox"/> Patented, Pending, Abandoned

Banner & Witcoff Ref. No.
Client Ref. No.

00771.00011
G PEM/NJ/Budev10

Power of Attorney


And I hereby appoint, both jointly and severally, as my attorneys with full power of substitution and revocation, to prosecute this application and to transact all business in the Patent and Trademark Office connected herewith the following attorneys and agents, their registration numbers being listed after their names:

ALTHER, Robert F.	31,810	HEMMENDINGER, Lisa M.	42,653	MORENO, Christopher P.	38,566
BANNER, Donald W.	17,037	HONG, Patricia E.	34,373	MOTTLEY, Darrell G.	42,912
BANNER, Mark T.	29,888	HOSCHBIT, Dale H.	19,090	NELSON, Jon O.	24,566
BANNER, Pamela I.	33,644	HYMEL, Lin J.	45,414	NIEGOWSKI, James A.	28,331
BECKER, Matthew P.	45,824	IWANICKI, John P.	34,628	PATEL, Binal J.	42,065
BECKETT, William W.	18,262	JACKSON, Thomas H.	29,808	PATHAK, Ajay S.	38,266
BERGHAMMER, Joseph J.	46,057	KAGAN, Sarah A.	32,141	PETERSON, Thomas L.	30,969
BODNER, Jordan	42,338	KATZ, Robert S.	36,402	POTENZA, Joseph M.	28,175
BUROW, Scott A.	42,373	KLEIN, William J.	43,719	PRATT, Thomas K.	37,210
CALLAHAN, James V.	20,095	KRAUSE, Joseph P.	32,578	RENK, Christopher J.	33,761
CHANG, Steve S.	42,402	LINEK, Ernest V.	29,822	RESIS, Robert H.	32,168
COHAN, Gregory J.	40,959	MALONE, Dale A.	32,155	RIVARD, Paul M.	43,446
COOPERMAN, Marc S.	34,143	MANNAVA, Ashok K.	45,301	ROBINSON, Douglas W.	32,751
CURTIN, Joseph P.	34,571	MAPLE, Marie-Claire B.	37,588	SCHAD, Steven P.	32,550
DAVID, Michael	44,642	MAY, Steven A.	44,912	SHIFLEY, Charles W.	28,042
DeMOOR, Laura J.	39,654	McDERMOTT, Peter D.	29,411	SHULL, Jason	47,085
EVANS, Thomas L.	35,805	McKEE, Christopher L.	32,384	SKERPON, Joseph M.	29,864
FEDORCHKO, Gary D.	35,509	McKIE, Edward F.	17,335	VAN ES, J. Pieter	37,746
FERGUSON, Catherine A.	40,877	MEDLOCK, Nina L.	29,673	WITCOFF, Sheldon W.	17,399
FICKLER, Debra A.	46,699	MEECE, Timothy C.	38,553	WOLFFE, Franklin D.	19,724
FISHER, William J.	32,133	MEEKER, Frederic M.	35,282	WOLFFE, Susan A.	33,568
GLEBOCKI, Christopher R.	38,800	MILLER, Charles L.	43,805	WRIGHT, Bradley C.	38,061
HANLON, Brian E.	40,449	MITRIUS, Janice V.	43,808		

All correspondence and telephone communications should be addressed to:

Banner & Witcoff, Ltd.
Customer Number: 22907 (WDC)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

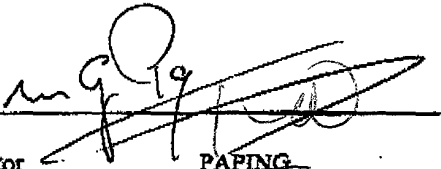Signature  Date 01-23-2001
Full Name of Inventor PAPING Max G.
Family Name First Given Name Second Given Name
Residence St. Michielsgestel, The Netherlands Citizenship Dutch
Post Office Address Dommelstraat 1A, NL-5271 At, St. Michielsgestel, The Netherlands